


**hanatek**

## PRECISION THICKNESS GAUGE



**Tel. No. (043)483 1795**

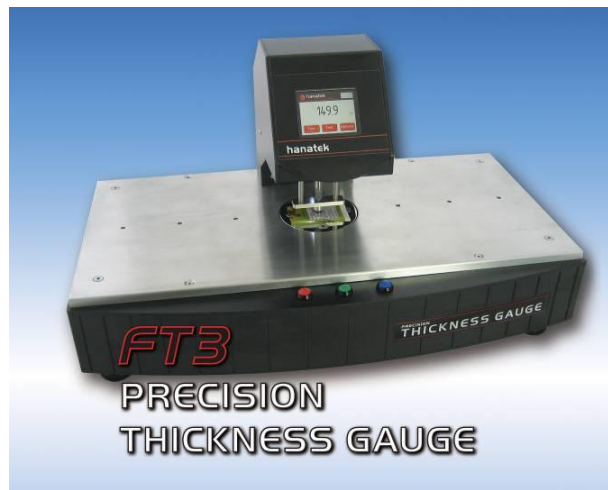


1.0

2.0

3.0



4.0

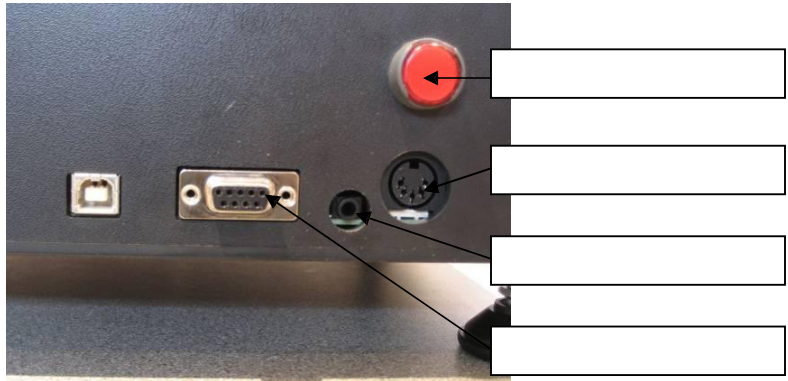

5.0


6.0




7.0







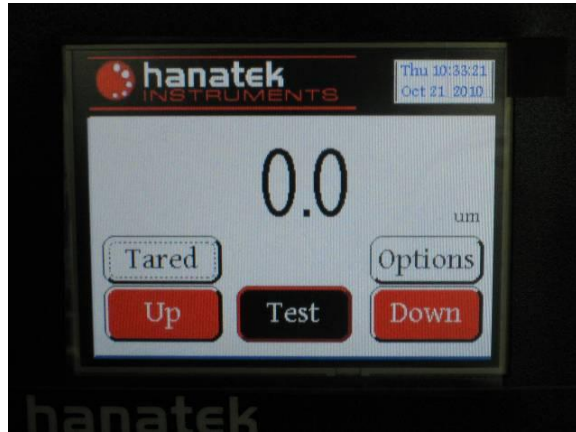

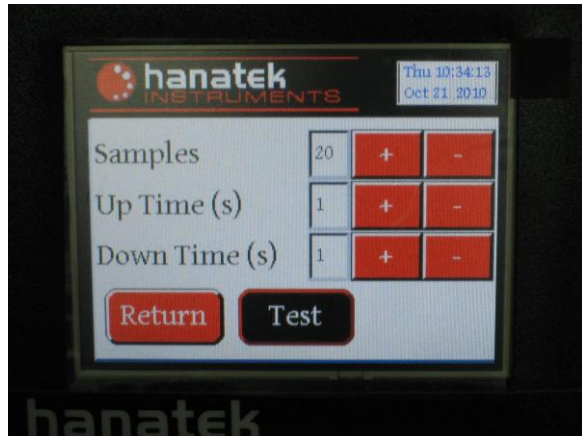




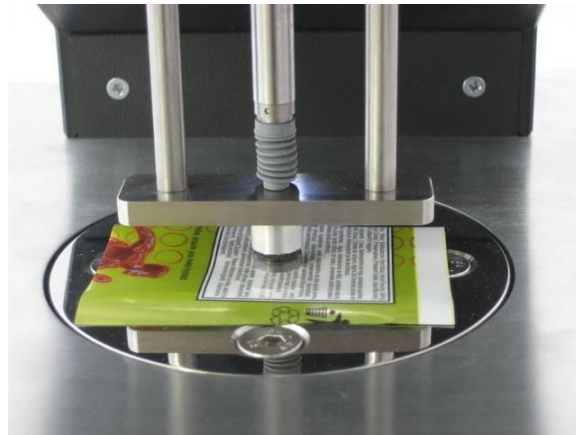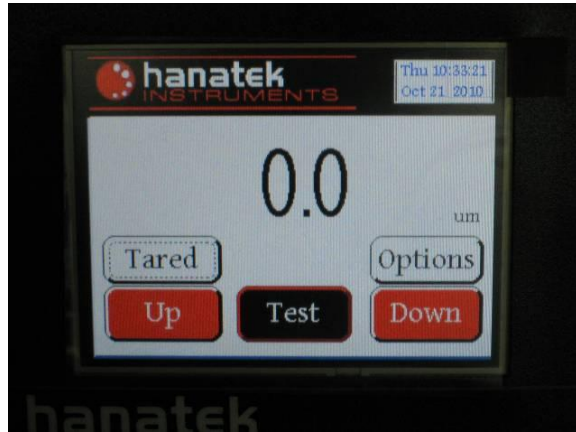



1.0

2.0

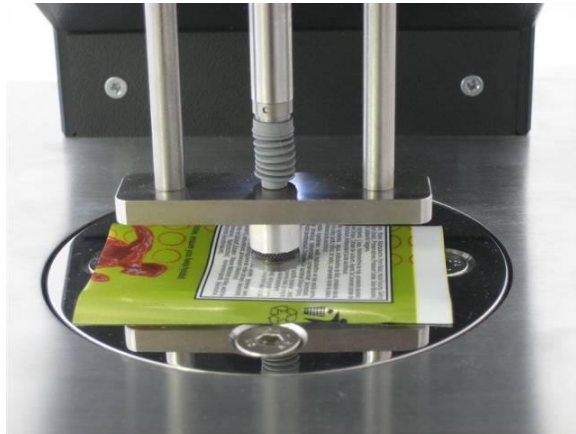

3.0



4.0

5.0


6.0

7.0

  
(444)1424-738622  
www.hanatekinstruments.com  
**Film Thickness Gauge**  
Instrument SN: FTG01110900004  
Last Certified: Oct 21 2010

Test Date: Oct 21 2010  
Test Time: Thu 10:44:28

Sample: 5  
Max: 320.0 um  
Min: 319.3 um  
Mean: 319.5 um  
SD: 0.299

  
(444)1424-738622  
www.hanatekinstruments.com  
**Film Thickness Gauge**  
Instrument SN: FTG01110900004  
Last Certified: Oct 21 2010

Test Date: Oct 21 2010  
Test Time: Thu 10:42:59


318.4 um	-	-	-
318.2 um	-	-	-
318.0 um	-	-	-
318.1 um	-	-	-
318.1 um	-	-	-
-	-	-	-
-	-	-	-

Sample: 5  
Max: 318.4 um  
Min: 318.0 um  
Mean: 318.1 um  
SD: 0.128

1.0

2.0

3.0

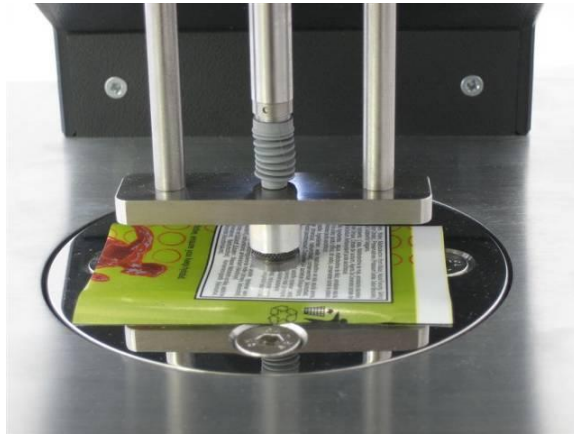

4.0



5.0


6.0

7.0

8.0




9.0

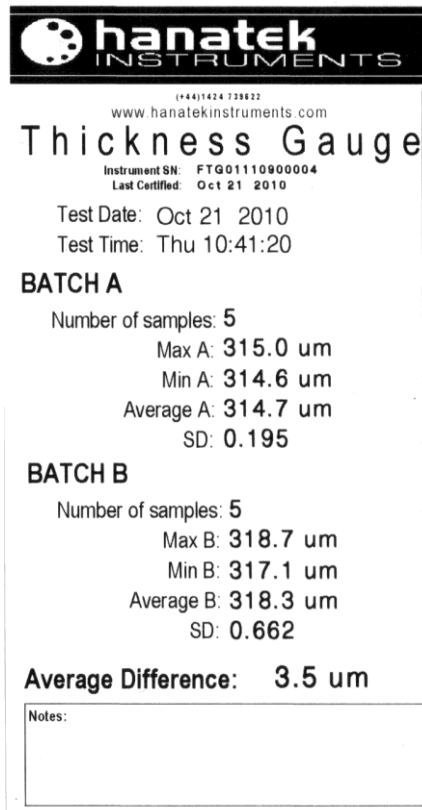



1.0

2.0

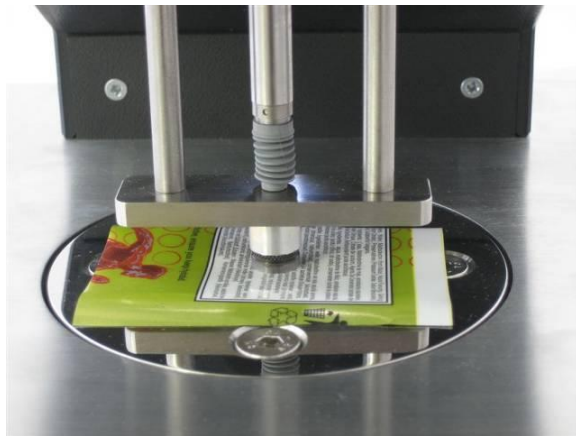

3.0



4.0

5.0

6.0

7.0


8.0

9.0

  
(+44)1424 738822  
www.hanatekinstruments.com  
**Film Thickness Gauge**  
Instrument SN: FTG01110900004  
Last Certified: Oct 21 2010

Test Date: Oct 21 2010  
Test Time: Thu 10:44:28

Sample: 5  
Max: 320.0 um  
Min: 319.3 um  
Mean: 319.5 um  
SD: 0.299

  
(+44)1424 738822  
www.hanatekinstruments.com  
**Film Thickness Gauge**  
Instrument SN: FTG01110900004  
Last Certified: Oct 21 2010

Test Date: Oct 21 2010  
Test Time: Thu 10:42:59

318.4 um	-	-	-
318.2 um	-	-	-
318.0 um	-	-	-
318.1 um	-	-	-
318.1 um	-	-	-
-	-	-	-
-	-	-	-

---

Sample: 5  
Max: 318.4 um  
Min: 318.0 um  
Mean: 318.1 um  
SD: 0.128

**Contact-**

**Telephone No:** 043-308-7302  
**Fax Number:** 043-308-7304

**E-mail:** [info@igt.co.jp](mailto:info@igt.co.jp)  
**Web Site:** [www.igt.co.jp](http://www.igt.co.jp)



